




3000-12T3 Pneumatic Section Inflated, Brackets Extended with Stripper Rubber Closed

The 3000-12T3 is manufactured to mount on an Ingersoll Rand T3W. The special base plate and mounting brackets allow the unit to be transported under the rig table, high enough not to strike the ground surface. The special mounting brackets will also enable the unit to be swiveled out from under the rig table to aid clearing the casing when driving off well site.



3000-12T3 Pneumatic Section Deflated, Brackets Retracted with Stripper Rubber Closed and Control Unit

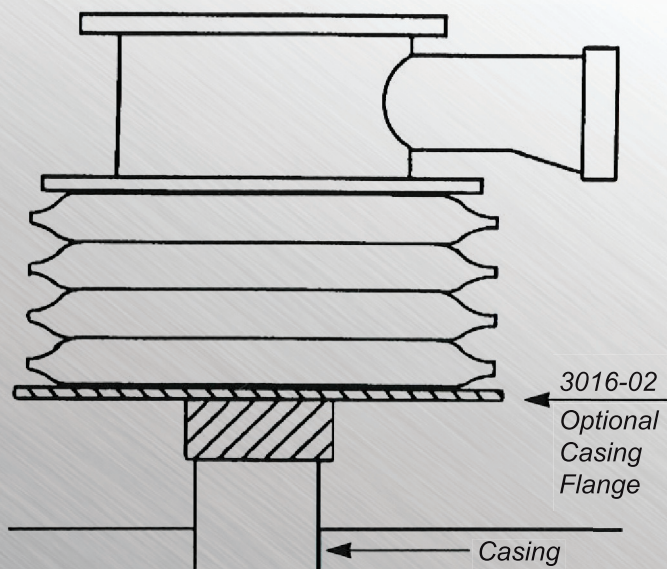


**Optional Casing Flange is available and should be used after casing is set.*

- In the event that your casing is too high for the retracted Diverter to clear the casing, simply:
1. Use the provided chains to attach the Diverter to the back half of your table
 2. Raise the rig
 3. Retract your table until retracted Diverter is horizontal
 4. Lower the rig and drive away from casing
 5. Lower the Diverter to the travel position

Outlet Options

- Standard 6" NPT Outlet
 - Optional 8" NPT Outlet
- (Note: This option will add 1½" to overall height)

DIMENSIONS
MODEL 3000-12T3

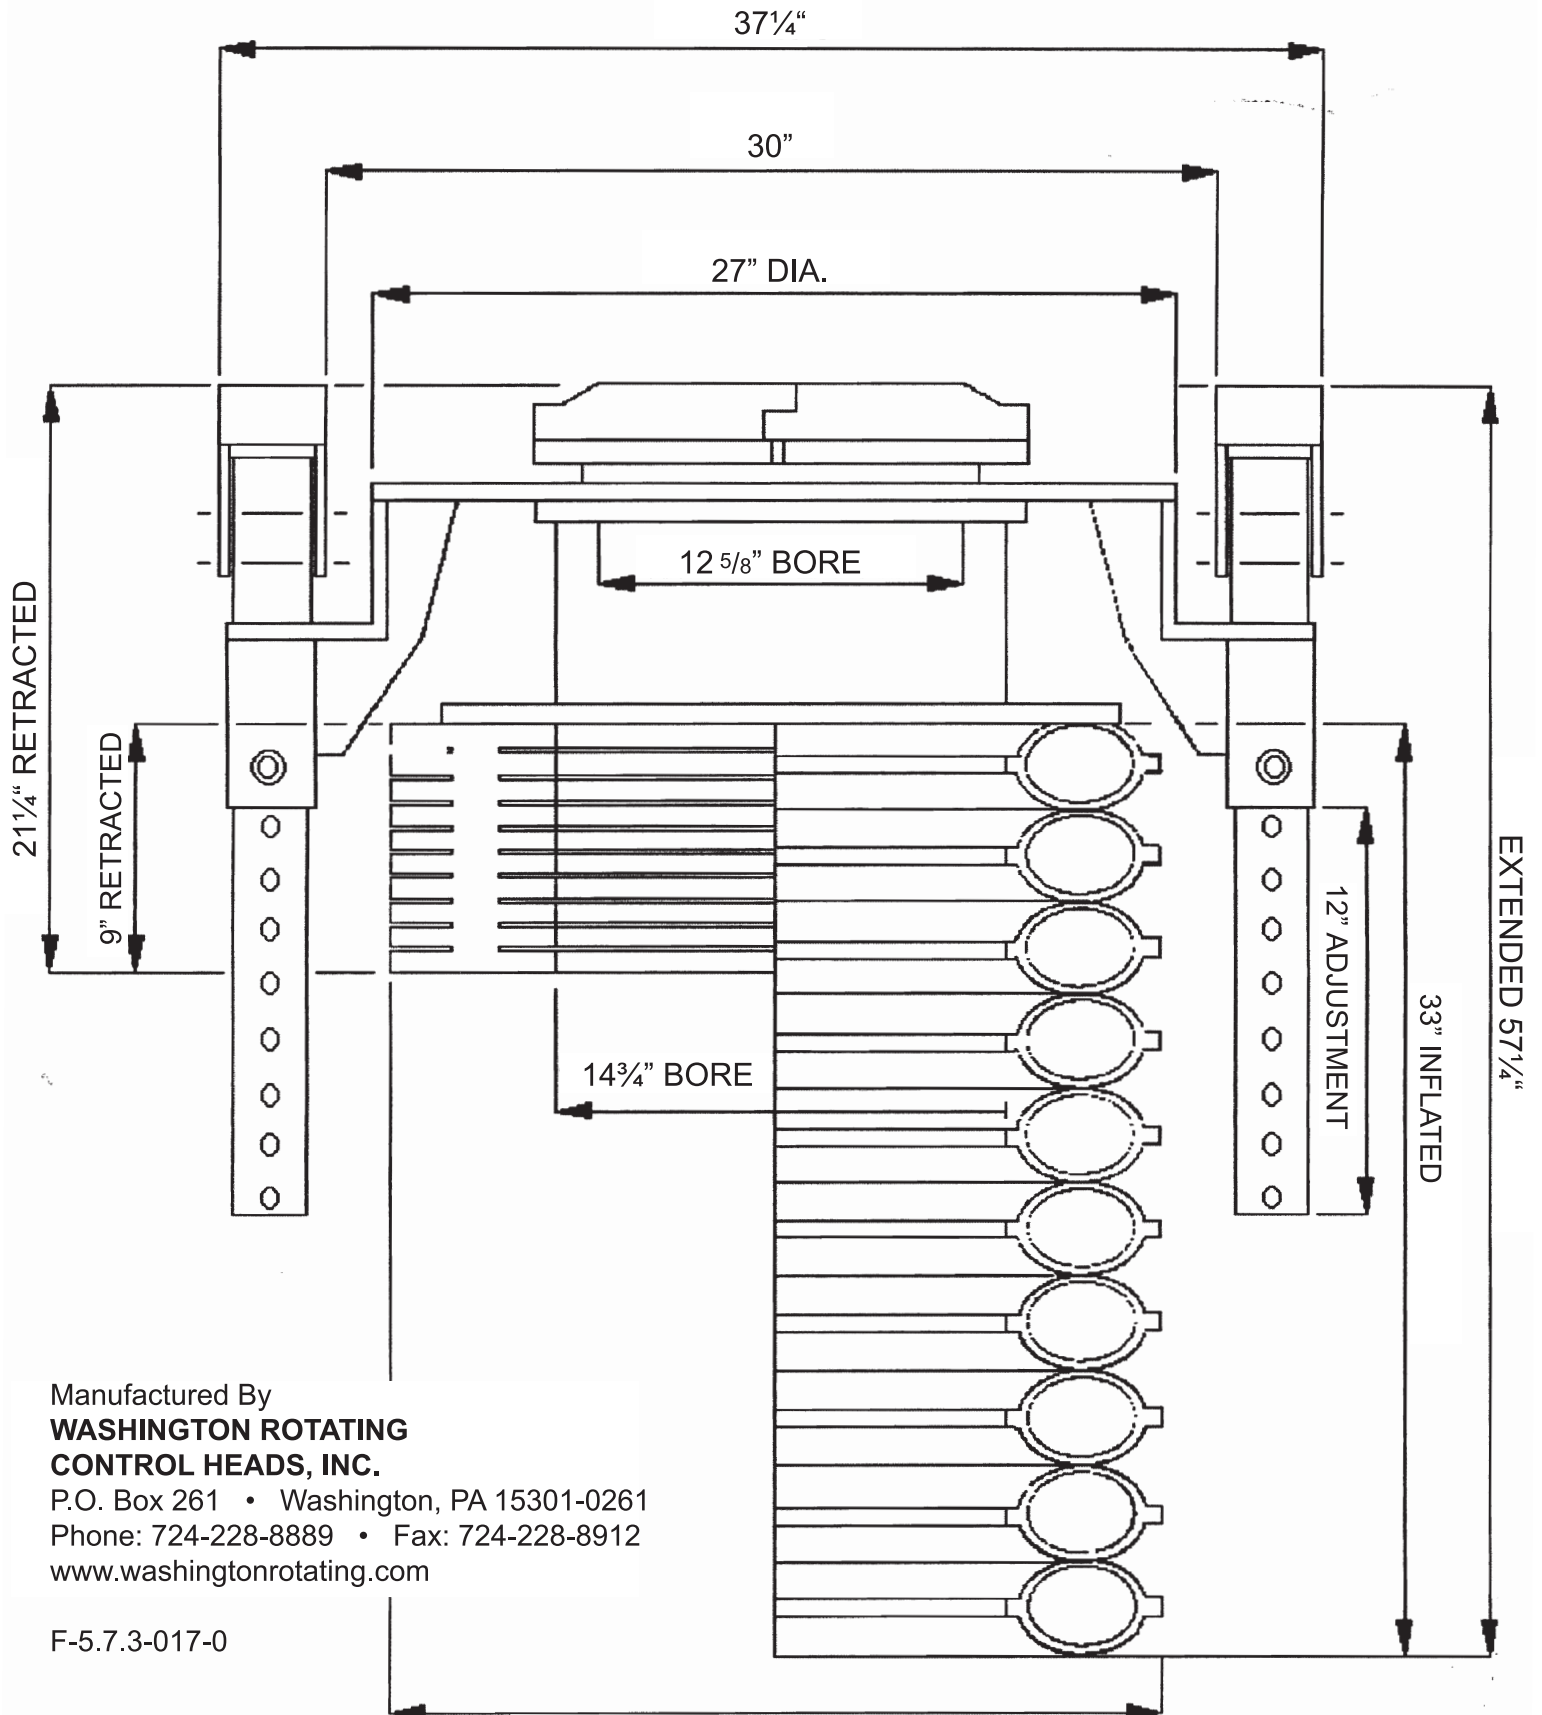

Manufactured By
**WASHINGTON ROTATING
CONTROL HEADS, INC.**

P.O. Box 261 • Washington, PA 15301-0261

Phone: 724-228-8889 • Fax: 724-228-8912

www.washingtonrotating.com

F-5.7.3-017-0