



MODEL 4021



The 4021 Diverter is manufactured to work on your casing. It can be flanged to casing, threaded on casing, or can be made up with the compression lock system. The compression lock system is dependable and easy to use. Simply slide Diverter over casing and tighten (3) to (6) bolts on compression ring. The rubber rings enclosed are then compressed around your casing, providing a slip-proof lock and seal on plastic casing, as well as steel.

The 4021 diverter is manufactured to utilize the 4012 series split wiper rubber. Because of the 4012's two-piece construction, the bit and/or hammer can be lowered into casing by simply opening the wiper rubber, passing the tool, and closing back around the drill pipe. Drill cuttings are now contained and diverted to the desired location through flow line.

Outlet Options


- Standard 4" NPT Outlet

4021 Diverter

With compression-lock, male T.H.D. is adaptable to all casing sizes up to 7"



Compression Locks	
Casing Size (in)	Part Number
4 1/2	4021-4CL
5	4021-5CL-PVC
5 1/2	4021-5CL
6	4021-6CL-PVC
6 5/8	4021-6CL
6 7/8	4021-6.875CL
7	4021-7CL
Sizes not listed may be available by request	

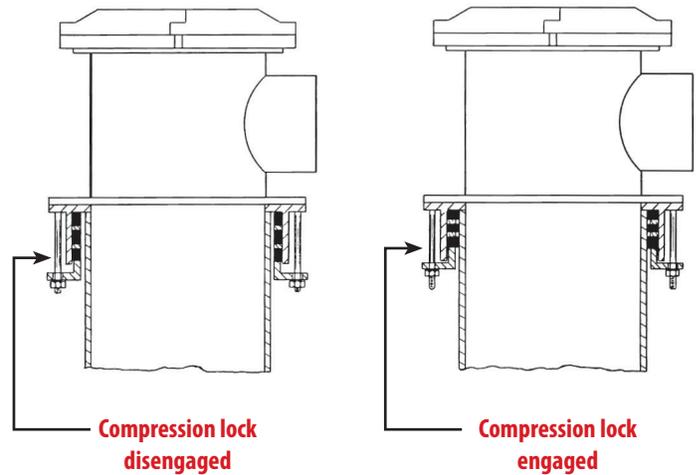

Manufactured by Washington Rotating Control Heads, Inc.

P: 724.228.8889 | F: 724.228.8912

63 Springfield Avenue | Washington, PA 15301

www.washingtonrotating.com