




SERIES 1360

STRIPPER-TUBING HEAD

The Washington Stripper-Tubing Head is a Well Head Tool that is designed to seal on the O.D. of a casing or tubing string while raising, lowering or rotating. It can be used on cavitation wells, work overs, conventional drilling operations and as a circulation head.

This unit utilizes the 9010 stripper rubber which is a self energized seal that does not require additional means for closure. The stripper rubber is held securely in the head by a two piece hinge clamp for fast and easy access. The 9010 stripper rubber features Washington Rotating's patented dual sealing system, incorporating both the main skirt seal as well as an upper secondary sealing surface. 9010 stripper rubbers are available to seal on 1-1/2" to 5-1/2" tubing.

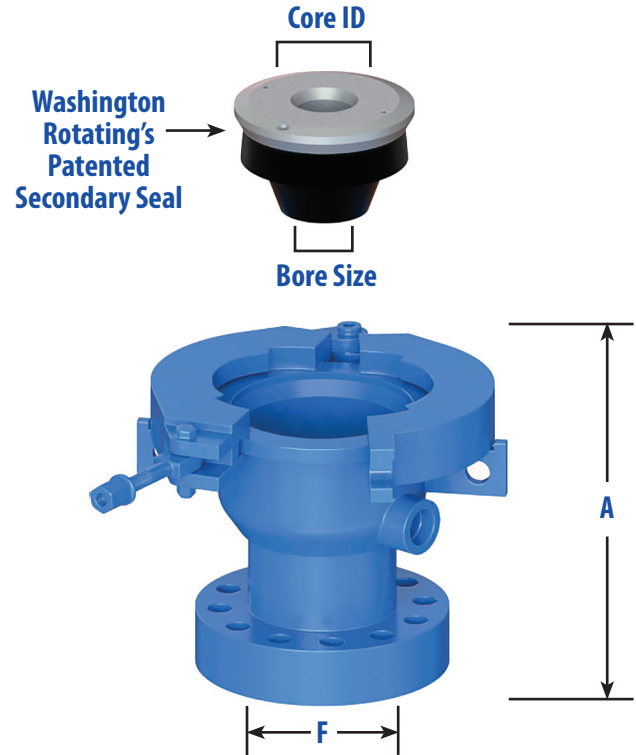

Model	Tubing Size	Bore Size	Core I.D.	Static Test Pressure
9010-AAX	1 1/2"	1"	3 3/8"	3500 PSI
9010-AX	2 3/8"	1 1/2"	3 3/8"	3500 PSI
9010-BX	2 7/8"	2"	4 1/2"	3500 PSI
9010-CX	3 1/2"	2 7/8"	5 1/4"	3500 PSI
R9010-DX	4 1/2"	3 1/2"	6 1/2"	3500 PSI
9010-EX	5 1/2"	4 1/2"	6 1/2"	3500 PSI

Inlet Flange	A	F	Outlet
7 1/6" - 3M	17 1/4"	7 1/6"	2" NPT
7 1/6" - 5M	18 1/4"	7 1/6"	2" NPT
9" - 3M	17"	9"	2" NPT
9" - 5M	18 1/4"	9"	2" NPT
11" - 3M	15 3/4"	10"	2" NPT
11" - 5M	17 1/2"	10"	2" NPT

WHEN ORDERING, PLEASE SPECIFY:

1. Model number
2. Inlet flange size
3. Outlet size
4. Drill pipe & tool joint OD
5. Drilling environment
6. High temperature, if applicable.

Custom options available per request.

All air bowls can be double drilled at your request.

Washington Rotating Control Heads, Inc.
 P: 724.228.8889 | F: 724.228.8912
 63 Springfield Avenue
 Washington, PA 15301
www.washingtonrotating.com

Our test pressures have been established through controlled test procedures. As a result of the ever-changing environment of well drilling operations along with wear and tear on equipment, which erodes longevity and safe operating parameters, Washington Rotating Control Heads, Inc., its Business Units, Agents and Affiliates make no warranty either expressed or implied on the test pressures contained herein. Washington Rotating Control Heads, Inc. does not under any circumstances recommend that its rotating control devices be used as primary blow out prevention equipment.

API Specification Q1 - Registration No. Q1-2651

ISO 9001:2015-APIQR Registration No. 2775