


Casing advancement systems, or drilled casings, are the most efficient and cost-effective way to drill into difficult ground conditions. The Divertech Casing Advancement Diverter is specifically designed for these casement advancement systems and is ideal for controlling cuttings while simultaneously drilling and casing. No pneumatic or hydraulic power is needed to operate the diverter.

The lower portion of the diverter locks onto the casing and will rotate independently of the outlet body when the casing turns allowing discharge control of drill cuttings. This, along with proven seal technology eliminates debris from raining down on the operator and equipment. The anti rotation arm seats against rig mast and prevents upper portion of the diverter from rotating.

All Casing Advancement Diverseters are equipped with a 6" ID outlet suitable for welding on desired discharge hose connection.

The anti-rotation arms are available by request for either or both sides.

There are two available models to accommodate 4 1/2" - 10" casing and 10 3/4" - 20" casing.

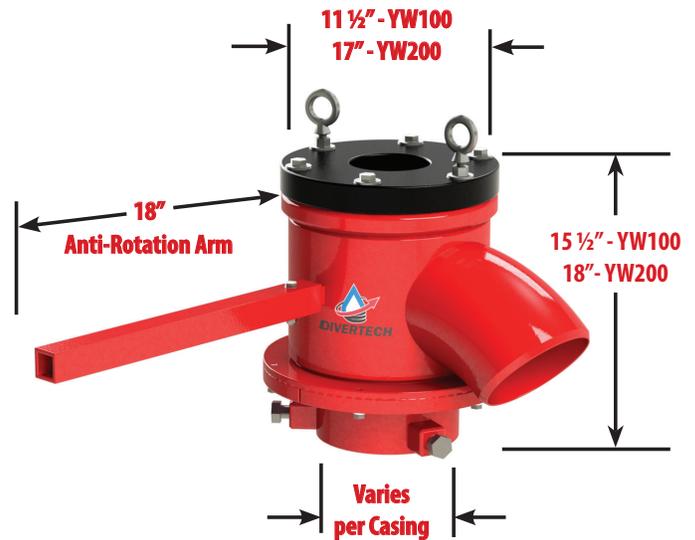

YW100 With 5012 Rubber and Anti-Rotation Arm

Compression Locks		
Casing Size (in)	YW100	YW200
4 1/2	YW4.5	
5	YW5.0	
5 1/2	YW5.5	
6	YW6.0	
6 5/8	YW6.625	
6 7/8	YW6.875	
7	YW7.0	
7 5/8	YW7.625	
7 3/4	YW7.75	
7 7/8	YW7.875	
8 5/8	YW8.625	
8 3/4	YW8.75	
9 5/8	YW9.625	
9 3/4	YW9.75	
9 7/8	YW9.875	
10 3/4		YW10.75
11 3/4		YW11.75
11 7/8		YW11.875
12 3/4		YW12.75
13 3/8		YW13.375
14		YW14.0
Sizes not listed may be available by request		

Models	Casing Sizes	Rubber PN	Drill Tube
YW100	4 1/2" - 10"	5010	2" - 5 1/2"
YW200	10 3/4" - 14"	5012	2" - 8 5/8"
Larger diameters available per request			

